iRobot®

Roomba®
Vacuuming Robot

600 Series

Regular Robot Care

Recommended Robot Care

To keep Roomba running at peak performance, perform the following care procedures. If you notice Roomba picking up less debris from your floor, empty the bin, clean the filter, and clean the brushes.

Robot Part	Care Frequency	Replacement Frequency
Bin	After each use	–
Filter	Once per week (twice per week in homes with pets)	Every 2 months
Brushes	Once per week (twice per week in homes with pets)	Every 6-12 months
Front Castor Wheel	Once every two weeks	Every 12 months
Side Brushes Cliff Sensors Charging Contacts	Once per month	–

Note: iRobot manufactures various replacement parts and assemblies. You may purchase replacement parts by visiting www.irobot.com/Roomba600. If you have questions regarding replacement parts, please contact iRobot Customer Care for more information.

Emptying the Bin

Press the button and pull to remove the bin.


Cleaning the Filter

Pull the filter to remove it. Tap the filter against the side of your household waste bin to clear the debris. Reinstall the filter.

Replace the filter every two months.

Cleaning the Brushes

1 Open the brush guard by lifting both tabs.

Tabs

2 Remove the brushes and remove any hair or debris.

Flexible Brush

Brush Bearings

Main Brush

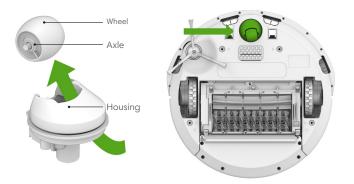**3** Remove and clean the hair and dirt from the brush bearings.

Cleaning the Front Castor Wheel

1 Pull firmly on the front wheel to remove it from the front castor assembly.

2 Remove any debris from inside the wheel cavity.

3 Spin the wheel by hand. If the rotation is restricted, remove the wheel from its housing and push firmly to remove the axle and clear any debris or hair wrapped around it.

4 Reinstall all parts when finished. Make sure the wheel clicks back into place.

Wheel

Axle

Housing

⚠ **Important:** A front wheel clogged with hair and debris could result in floor damage.

Cleaning the Cliff Sensors and Charging Contacts

Wipe all sensors and charging contacts with a clean, dry cloth.

Cleaning the Side Brush

Use a small screwdriver to remove the screw. Pull the side brush to remove it from the robot. Remove any hair and/or debris and reinstall the side brush.